



Type	AT3-30KVA 230-400V IP23
Description	Three-phase auto-transformer 30KVA IP23
Product code	CV058414
Standards	EN60076

Date 25/09/2019

Rated Power	AUTO 30KVA
-------------	------------

Input

Rated input voltage	230 V
Rated frequency	50-60 Hz
Primary current	76 A
Winding material	Al

Output

Rated output voltage	400V
Secondary current	43,3 A
Winding material	Al

Marks

	CE
--	----

Environment

Cooling method	AN
Ambient temperature max	40°C/F
Winding temperature rise	CLASS F
Altitude	1000 mt


Terminals and mounting

Terminals	TERMINAL BLOCKS
Fixing method	SCREWS

Dimensions (mm) and weight (kg) - Transformer*

A	B	C	Weight
420	230	385	80

Vector group	Yna0
--------------	------



Performance**



No-load losses	120 W
Load losses at 75 °C	465 W
Efficiency at 75 °C	98,10%
Ucc TOT (UccR / UccX) at 75 °C	2,00%

Safety and protection

Insulation class	CLASS F
Working class	CLASS F
Protection degree	IP00
Inrush current	8-9 x In
No-load Voltage	405,7 V

Dimensions (mm) and weight (kg)- Enclosure IP23

A	B	C	Weight
640	550	600	26

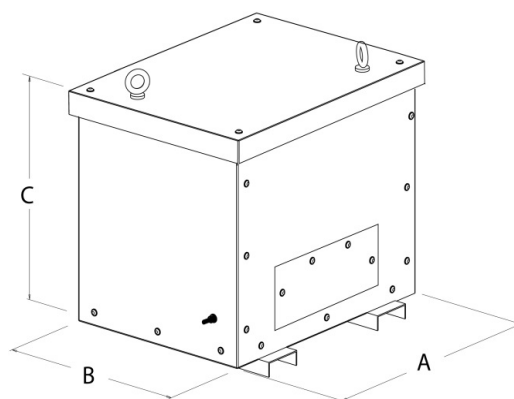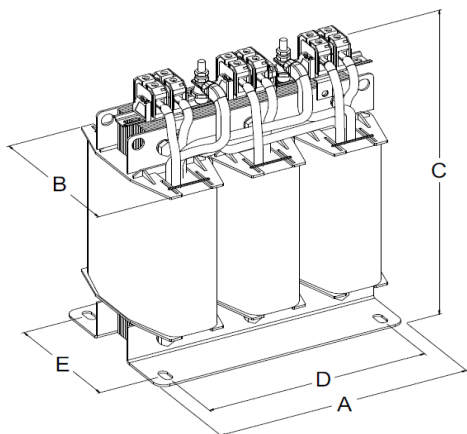

* dimensions and weight tolerance: ± 4%

