

# SURGE PROTECTION DEVICE




## Voltage-limited type – CLASS II(MOV)


SP40-275VT/2P (CV067300)



Outside drawing

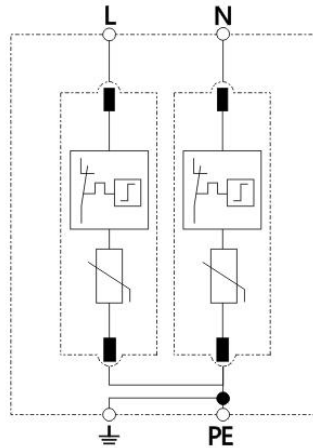

Electrical principle

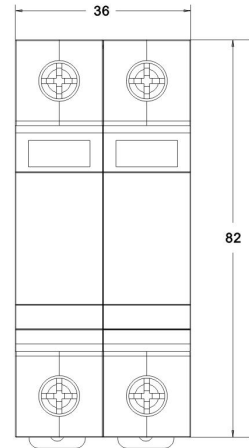

Outline dimension

Type 2 surge protective device especially designed for low-voltage power supply system at the boundaries from lightning protection zone 1-2 and higher.

- Class II/class C SPD, max discharge current 40kA 8/20
- Pluggable design surge arrester for easy replacement
- Comply with IEC61643-11 and UL1449-4<sup>th</sup>
- The power module surge protector shall be replaced immediately when the deterioration indication window is "red".

Part No.	SP40-275VT/2P
In accordance with	IEC61643-11:2011; UL1449 4th
Category IEC/VDE	Type 2, Class II
Max. continuous operating voltage (AC/DC) U <sub>c</sub>	275/350
Nominal discharge current(8/20) I <sub>n</sub>	20kA
Max. discharge current(8/20) I <sub>max</sub>	40kA
Voltage protection level/Up @I <sub>n</sub>	<1,5kV
Response time	≤25 ns
leakage current	≤20
Backup fuse(only required if not already provided in mains)	125A gL/gG
Action time of the deterioration indicator device	(320mA) ≤1
Operating temperature range	- 40°C ~ + 80°C
Cross-section of connection wire	Single-strand 35mm <sup>2</sup> ; multi-strand 25mm <sup>2</sup>
Torque applied by the screws	2.0-2.5 Nm
Installation form	35mm DIN-rail in accordance with EN 50022/DIN46277-3
Enclosure material	thermoplastic; extinguishing degree UL94 V-0
Housing protection level	IP20
Installation width	2 modules, DIN 43880
Thermal disconnecter	Internal green – normal ; red - failure
Remote alarm contact	optional
Additional data for Remote Alarm Contacts	/
Remote alarm contact type	Isolated Form C
Switching capability Un/In	/
Max. Size of connecting wire	/