


FDV-DOKUMENTASJON

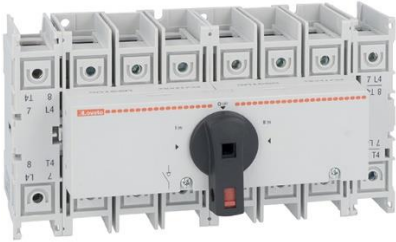


Februar 23


Manuelle vendere

Produktbeskrivelse	Manuelle brytere/vendere beregnet for anlegg med to innkommende strømforsyninger som f. eks nett og aggregat.													
Teknisk info	Merkestrøm (A) Antall poler Ui (V) Uimp (V) Forurensningsgrad IP grad	63, 125 3, 4 1000 8000 3 IP20	Verktøy 63A Verktøy 125A Max tverrsnitt 63A (mm ²) Max tverrsnitt 125A (mm ²) Tilstrammingsmoment 63A (Nm) Tilstrammingsmoment 125A (Nm)	Philips 2 Unbrako 4 16 70 1,8-2 5-6										
Forvaltning	Driftstemperatur (C°) -25 - +55 °C Lagringstemperatur (°C) -40 - +70 °C													
Drift	Renhold: Tørkes av med tørr fille eller støvsuging hvis nødvendig Energiforbruk: Maks 6,3 W pr. pol Henvisninger: For ytterligere informasjon, se produktark eller kontakt Cenika AS													
Vedlikehold	Rutiner: Det anbefales årlig termografering Annet: Ettetrekking anbefales dersom termografering uteblir													
Produkt	<table border="1"> <thead> <tr> <th>Varenummer</th> <th>Beskrivelse</th> </tr> </thead> <tbody> <tr> <td>CV080712</td> <td>Manuell vender 63A 3P</td> </tr> <tr> <td>CV080736</td> <td>Manuell vender 63A 4P</td> </tr> <tr> <td>CV080729</td> <td>Manuell vender 125A 3P</td> </tr> <tr> <td>CV080743</td> <td>Manuell vender 125A 4P</td> </tr> </tbody> </table>				Varenummer	Beskrivelse	CV080712	Manuell vender 63A 3P	CV080736	Manuell vender 63A 4P	CV080729	Manuell vender 125A 3P	CV080743	Manuell vender 125A 4P
Varenummer	Beskrivelse													
CV080712	Manuell vender 63A 3P													
CV080736	Manuell vender 63A 4P													
CV080729	Manuell vender 125A 3P													
CV080743	Manuell vender 125A 4P													


63A 3P

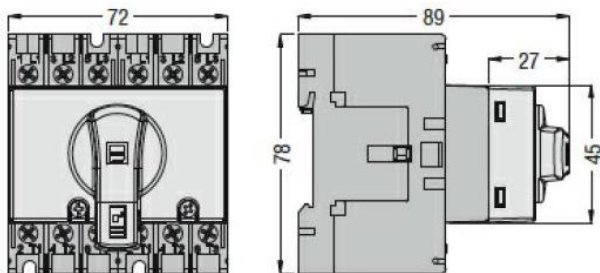

63A 4P

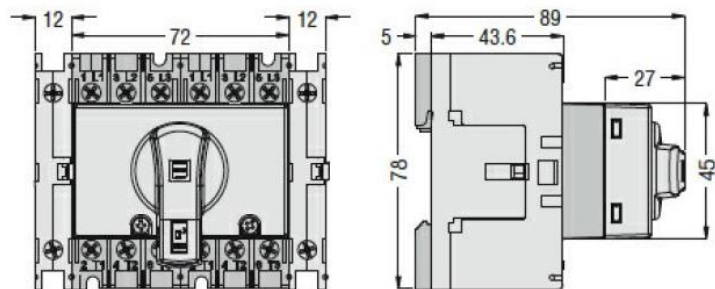

125A 3P

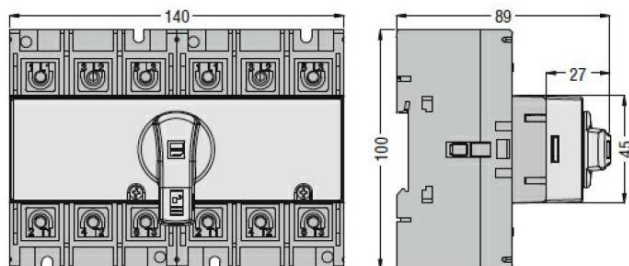

125A 4P

